



# CONTAINERS

**The Basics..**the standard reefer containers. Equipped with Carrier refrigerating machinery and available in 10B, 20B, 40B & 40B HC. Designed for transport and storage purposes. Lease, lease/purchase & purchase.




**Standard specifications:**

- aluminium "T"-bar floor
- Double container doors
- (mechanical) datalogger
- High Grade stainless steel lining inside

**Options:**

- Ramp (cap. 1.000kg.)
- Container lock
- Extension cord/adaptor
- (GPS-) alarm
- Extra powerful machinery [-35°C]
- Aluminium flat floor
- Racks

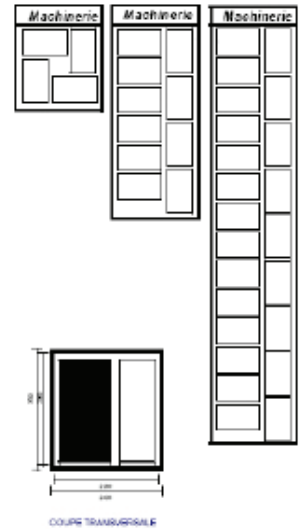

Machinery	Electrical system	Cool / freeze capacity	Temperature range	Refrigerant	Cons. Amp.
Carrier	380/460 V 50/60 Hz. 5P (3 Phase, earth & 0)	32 Amp. 3hr 380/460 V Fusible: 25 Amp.	-18°C 4,9 - 6,6 kW +2°C 9,4 - 12 kW	-22°C / +22°C < 38°C ambiante	16 Amp.

Model	Loading capacity (pallets)	Internal dimensions (l. x w. x h.) in mm.	External dimensions (l. x w. x h.) in mm.	Door opening (w. x h.) in mm.	Floor surface	Capacity
<b>10B</b>	4	2,35 X 2,28 X 2,26 M.	2,99 X 2,44 X 2,59 M.	2,26 X 2,20 M.	5 M <sup>2</sup>	12 M <sup>3</sup>
<b>20B</b>	10	5,45 X 2,28 X 2,26 M.	6,06 X 2,44 X 2,59 M.	2,26 X 2,20 M.	12 M <sup>2</sup>	28 M <sup>3</sup>
<b>40B</b>	23	11,53 X 2,28 X 2,26 M.	12,19 X 2,44 X 2,59 M.	2,26 X 2,20 M.	26 M <sup>2</sup>	59 M <sup>3</sup>
<b>40B HC</b>	23	11,53 X 2,28 X 2,55 M.	12,19 X 2,44 X 2,89 M.	2,26 X 2,50 M.	26 M <sup>2</sup>	67 M <sup>3</sup>



Refrtrade invests heavily in new equipment which consumes less energy (and therefore less CO<sub>2</sub>), produce less noise and above all deliver more performance.